

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number
WO 2005/084125 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/IL2005/000250

(22) International Filing Date: 3 March 2005 (03.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
160738 4 March 2004 (04.03.2004) IL

(71) Applicants and

(72) Inventors: AMISAR, Shai [IL/IL]; Nahalat Izhak 18b-
241, 67448 Tel-Aviv (IL). RADOMSKI, Ronen [IL/IL];
Oren 9, 34731 Haifa (IL).


(74) Agents: Pyernik Rutman et al.; Beit Etzion, 91 Herzl St.,
P.O.Box 10012, 84106 Beer-Sheva (IL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: LIQUID FLOW MONITORING APPARATUS

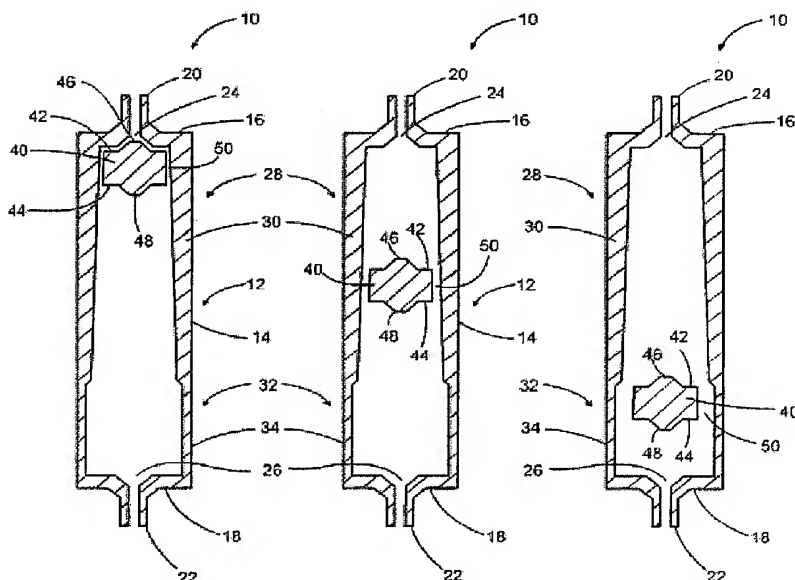

(57) Abstract: The present invention is directed to a method and apparatus for monitoring liquid flow using a generally elongate housing having first and second ends having formed therein a liquid inlet and outlet, respectively, for permitting a liquid flow through the elongate housing, and wherein the elongate housing has a cross-sectional profile which varies along the length of the elongate housing so as to impart predetermined flow characteristics to a liquid flowing therethrough. A flow rate indicator float is disposed within the elongate housing operative to be displaced therealong in accordance with a liquid flow rate therethrough and a flow rate indicator means associated with the flow rate indicator float, are used for providing a position-related indication of the rate of liquid flow through the elongate housing.

WO 2005/084125 A2



Published:

— *without international search report and to be republished
upon receipt of that report*

(15) Information about Correction:

see PCT Gazette No. 49/2005 of 8 December 2005, Section II

(48) Date of publication of this corrected version:

8 December 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.